

Use of Motor Protection Circuit Breakers with Variable-Frequency Drives

Bulletin 140MT Motor Protection Circuit Breakers

Topic	Page
Summary of Changes	1
Introduction	3
Typical Application	3
Circuit Breakers on the "line side" of a VFD	4
Circuit Breakers on the "load side" of a VFD	5
Conclusion	6

Summary of Changes

This publication contains the following new or updated information. This list includes substantive updates only and is not intended to reflect all changes.

Topic	Page
Added support for 140MT and 140UT	Throughout

Important User Information

Read this document and the documents listed in the additional resources section about installation, configuration, and operation of this equipment before you install, configure, operate, or maintain this product. Users are required to familiarize themselves with installation and wiring instructions in addition to requirements of all applicable codes, laws, and standards.

Activities including installation, adjustments, putting into service, use, assembly, disassembly, and maintenance are required to be carried out by suitably trained personnel in accordance with applicable code of practice.

If this equipment is used in a manner not specified by the manufacturer, the protection provided by the equipment may be impaired.

In no event will Rockwell Automation, Inc. be responsible or liable for indirect or consequential damages resulting from the use or application of this equipment.

The examples and diagrams in this manual are included solely for illustrative purposes. Because of the many variables and requirements associated with any particular installation, Rockwell Automation, Inc. cannot assume responsibility or liability for actual use based on the examples and diagrams.

No patent liability is assumed by Rockwell Automation, Inc. with respect to use of information, circuits, equipment, or software described in this manual.

Reproduction of the contents of this manual, in whole or in part, without written permission of Rockwell Automation, Inc., is prohibited.

Throughout this manual, when necessary, we use notes to make you aware of safety considerations.



WARNING: Identifies information about practices or circumstances that can cause an explosion in a hazardous environment, which may lead to personal injury or death, property damage, or economic loss.



ATTENTION: Identifies information about practices or circumstances that can lead to personal injury or death, property damage, or economic loss. Attentions help you identify a hazard, avoid a hazard, and recognize the consequence.

IMPORTANT

Identifies information that is critical for successful application and understanding of the product.

These labels may also be on or inside the equipment to provide specific precautions.



SHOCK HAZARD: Labels may be on or inside the equipment, for example, a drive or motor, to alert people that dangerous voltage may be present.



BURN HAZARD: Labels may be on or inside the equipment, for example, a drive or motor, to alert people that surfaces may reach dangerous temperatures.



ARC FLASH HAZARD: Labels may be on or inside the equipment, for example, a motor control center, to alert people to potential Arc Flash. Arc Flash will cause severe injury or death. Wear proper Personal Protective Equipment (PPE). Follow ALL Regulatory requirements for safe work practices and for Personal Protective Equipment (PPE).

The following icon may appear in the text of this document.



Identifies information that is useful and can help to make a process easier to do or easier to understand.

Introduction

A motor branch circuit, including a Variable Frequency Drive (VFD) and one or more Motor Protection Circuit Breakers (MPCBs), is a complex system and its performance depends on all components, devices, configuration and their interconnection.

In applications where an MPCB is to be used on the output (load side) of a VFD, several factors must be considered due to the influences of voltage pulses and current harmonics. Current harmonics and reflected voltage waves generated with long cables at the motor terminals can have a significant negative impact on the MPCB and switchgear performance if they are not taken into account appropriately.

This publication explains some considerations for the selection of MPCBs. European IEC 60947-4-1 nomenclature refers to MPCBs as Motor Protection Circuit Breakers. In North America, UL 508 / UL 60947-4-1 nomenclature refers to Bul. 140MT devices as Self-Protected Combination Motor Controller, or a Type E Motor Controller applicable under NEC §430-52 C.6. These clarifications aside, the application issues for use with variable frequency drives do not change globally.

The information in this paper has been developed through known engineering principles and validated by thorough testing and simulation.

Typical Application


Bulletin 140MT Motor Protection Circuit Breakers provide the functional control and protection requirements as specified by local electrical codes such as the National Electrical Code (NEC). Whether in single- or multi-motor installations, the 140MT MPCB provides several key control and protection functions required for these types of installations. 140MT controllers used as a Self-protected Manual Motor Controller can provide the individual motor circuit with following functionality:

- Disconnect function, providing approved isolation of motor circuits (IEC symbol )
- Manual motor controller, turning the individual motor circuit on and off
- Motor overload protection, protecting the motor from thermal overload
- Short circuit protection for the individual motor and the conductors

ATTENTION:

Not every circuit breaker or MPCB provides approved isolation / disconnect function (IEC symbol ). To cover a disconnect function, if needed, either circuit breakers or load switches suitable for use as disconnecting means (switch disconnecter per IEC, symbol ) should be used.

Figure 1 - Typical Multi-motor Installation with VFD

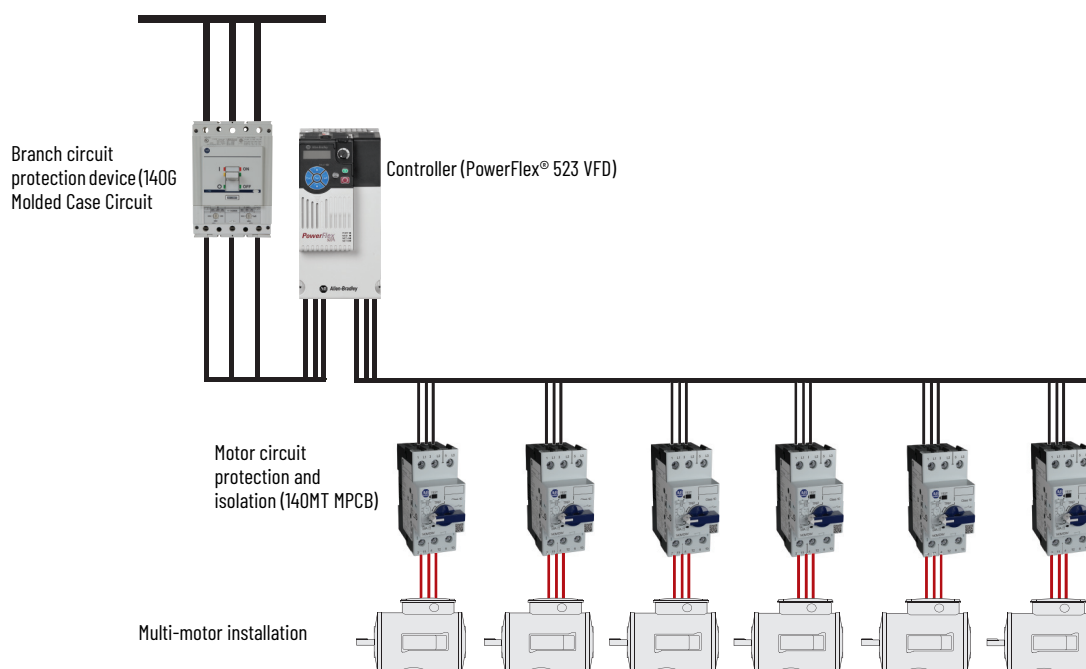

General

MPCBs are designed to handle the operational frequency range up to 60 Hz. Since they include magnetic short circuit trip coils, the carrier frequency of the VFD should be selected as low as possible and must not exceed 4 kHz to avoid overheating. This is in agreement with recommendations given for line terminators and filters.

The actual motor operational current of the MPCBs (140MT) should be as close as possible to the low end of their current (setting) range to keep the power loss at minimum.

When MPCBs, due to a partially loaded motor, operate at currents lower than the min. current setting, they are usually not able to trip thermally when additional heating in the magnetic trip coil occurs. The breaker, however, still is permanently experiencing the load of the voltage pulses as described below. Magnetic only versions (MCP) rated lower than 10 A with separate bimetallic overload-relays are also not suitable for these applications since the MCPs have no thermal trip capability for self protection. In addition, the separate bimetallic overload-relays rated 1 A and below would suffer from heating as well and probably not trip for self protection.

The user manual for each VFD drive lists the cable length limitations based on drive size and the quality of the insulation system in the chosen motor. See publication “[DRIVES-IN001](#): Wiring and Grounding Guidelines for Pulse Width Modulated (PWM) AC Drives”.

There are various options of filter solutions available to reduce voltage rise time or occurrences of reflected waves.

The application of filter solutions like line reactors (3R...) and reflected wave reactors (3RWR...) can be beneficial with regard to reduced voltage rise times.

To maintain the insulation coordination required for the entire drive system, the occurrence of reflected waves at the motor terminals must be limited to $1400 V_{pk}$ (IEC-Motors Category A), since the insulation voltage of the switchgear is only $690 V_{RMS}$. The max. permissible operational voltage therefore is 500V AC for these applications.

As an optimal solution, sine wave filters would reduce the occurrence of reflected voltage waves.

Circuit Breakers on the “line side” of a VFD

NEC §430.52 and §430.53 resp. requires an MCCB (e.g. 140UT-xx) or set of fuses for short-circuit protection on the line side of a VFD. An MPCB may be used in a single-motor-application provided it is tested and specified in the VFD's instruction.

The input current of VFDs is non sinusoidal, containing high peaks and harmonic currents. The peak values can be 1.5...4 times higher than the VFD output currents. The 140MT circuit breaker used on the line side of the drives will provide branch circuit protection against short circuits and isolation of the complete VFD circuit through the disconnecting function.

When the motor operates at low speed (low frequency of the output current) the peak input current value can rise noticeably and tripping of the line side breaker may occur.

- To avoid nuisance tripping, the line side breaker must be selected according to the maximum input current to the VFD, not to the rated motor full load current.
- Since 140MT is a Self-Protected Motor Controller and should be selected to match motor full load current, the thermal overload function will compete with the overload function of the VFD. This fact alone suggests an alternative approach may be useful. However, many have applied 140MT-xxE and 140MT-xxT successfully because peaks of VFDs are transient in nature.
- 140UT, a UL 489 approved thermal-magnetic Molded Case Circuit Breaker, can be used on the line side of a VFD to provide short circuit protection per NEC §439-52 c.1. The selection of a thermal-magnetic breaker can be as large as 2.5 times full load current. The selection, combined with the 15 times fixed magnetic rating, allows for short circuit protection measured in milliseconds and avoids the problems of selecting a Self-Protected Motor Controller based on full load amps. This method avoids competing overloads tripping with VFD overload. 140UT is available up to 40 amps (80% rated, maximum 32 amps continuous).
- Refer to the VFD User Manual for the listing of approved branch circuit protection devices and their sizing recommendations.

Circuit Breakers on the “load side” of a VFD

General

In multiple motor applications on the load side of the VFD it shall meet the group installation requirements per NEC §430.53. In those cases only individual overload protection is required.

When bypassing a VFD via paralleling, using a contactor for example, branch circuit protection is required for either path. The load side must include external overload protection for either the contactor or the VFD.

When circuit breakers are installed on the load side of a VFD, several aspects have to be considered to help ensure proper and reliable operation:

VFDs are limited to a max. output current. The fixed short circuit trip level of MPCBs on the other hand is approximately 14 times the max. current setting. Alternatively, 140MT-xxT motor controllers are approximately 22 times the maximum setting. Since the cut off time of the VFD is in range of μs whereas the reaction time of the trip unit is in the range of ms no short circuit protection function of an individual branch in a multi motor application is given through the MPCB. Even if the trip current value does not exceed the max. output current of the VFD, only a thermal trip might occur.

Due to the PWM voltage pulses and due to the surge impedance of the motor, reflections of the voltage pulses occur at the terminals of the motor. Their amplitude is dependent of the:

- system voltage
- voltage rise time t_{rise} of the VFD
- current rating of the MPCB (surge impedance)
- operational voltage (DC_{BUS} -voltage)
- location of the MPCB (close to the VFD output or close to the motor)
- cable type and length between MPCB and motor (surge impedance).

System voltages up to 240V AC need no specific consideration. To reduce the impact on the system components at higher operational voltages,

- the interconnection between VFD and motor should be as short as possible and not exceed manufacturers' recommendations.
- Location of the MPCB near the motor is the preferred solution.

The formula to determine the max. permissible (“critical”) cable length l_{crit} at which reflected voltage phenomena are fully developed given by motor and drive manufacturers is a suitable estimation also for applications with MPCBs located near the VFD:

EXAMPLE: Equation 1

$$l_{crit} \approx \frac{v_{cable} * t_{rise}}{2}$$

l_{crit} - critical length

v_{cable} - propagation speed

t_{rise} - rise time of VFD pulses

Typical pulse propagation speed on a cable is $v_{cable} \approx 150 \text{ m}/\mu\text{s}$. The voltage rise time t_{rise} is dependent on the drive semiconductor technology.

Semiconductor Technology	$t_{rise} [\mu\text{s}]$		$l_{crit} [\text{m}]$	
	$t_{rise \text{ min.}}$	$t_{rise \text{ max.}}$	$t_{rise \text{ min.}}$	$t_{rise \text{ max.}}$
BJT	0.2	2	15	150
GTO	2	4	150	300
IGBT	0.05	0.4	3.75	30

EXAMPLE: Assuming a voltage rise time of 200 ns (example: for BJT) the critical length is 15 m.

If MPCBs are located near the output of the VFD, those devices rated 10 A and above are not significantly affected by these effects due to their constructional properties. The surge impedance of MPCBs < 10 A, however, does not match that of the cable sufficiently therefore reflected voltage waves originated at the motor terminals and returning to the MPCB cause high dielectric stress on the trip coils resulting in accelerated aging of the insulation and probably disabling of the instantaneous short circuit trip function.

Always take measurements of rise times on site to verify the real conditions for the following:

- Standard MPCBs rated 10 A and higher the max. cable lengths of drive manuals apply.
- Standard MPCBs below 10 A the value according to "Equation 1" or the drive manual applies, whichever is lower.
- Alternatively specific MPCBs suitable for downstream VFD application shall be used (e.g. 140MT-D9V-xxx).

Conclusion

Unless specifically stated as suitable for use like 140MT-D9V-xxx, switchgear selection in these applications should take into account the complexity of the system dynamics such as capacitive loads and reflected wave. There are several factors that must be considered in the installations where MPCBs are used at the output of VFD to minimize the influence of voltage pulse and current harmonics.

- The MPCB should be selected so that its current setting is close to the low end of the setting range. This reduces the basic temperature level at the trip coil and allows adjustments.
- For standard MPCBs rated 10 A and higher – The interconnection between the VFD and motor should be as short as possible and not exceed drives manufacturer recommendations.
- For standard MPCBs below 10 A – The maximum permissible ("critical") cable length l_{crit} value according to [Equation 1](#) or the drive manual applies, whichever is lower. Using [Equation 1](#) to determine l_{crit} values given by motor and drive manufacturers, at which reflected voltage phenomena are fully developed, is also a suitable estimation for applications with MPCBs located near the VFD.
- The preferred location of MPCB installations is as close to the motor as possible, in order to reduce the cable length between the motor and MPCB.
- The chopping frequency of the VFD should be as low as possible and not exceed 4 kHz.
- Filter solutions, like line reactors and reflected wave reactors, can be applied to reduced voltage rise times. Application of sine wave filters would eliminate the occurrence of reflected voltage waves. These are suggested by drive manufacturers.
- Always take measurements of peak voltages to verify effectiveness of the measures.
- The surge impedance of electronic overload relays is also low in principle and unless specifically stated they are not suitable for this kind of application, since their current sensor technology may not be able to measure the load current and harmonics correctly when operating at frequencies outside their nominal sensing range.
- Main circuits of contactors and load switches are normally not affected as described above, due to their low surge impedance. However, depending on capacitive load through long cables or capacitor charging currents, contact welding might occur when switched under load, so consideration related to capacitive load shall be taken in account in selection of these devices to be used with drives.
- Consider the use of 140UT on the line side of the VFD when continuous currents are less than 32 amps.

Additional Resources

These documents contain additional information concerning related products from Rockwell Automation. You can view or download publications at rok.auto/literature.

Resource	Description
Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1	Provides general guidelines for installing a Rockwell Automation industrial system.
Product Certifications website, http://www.ab.com	Provides declarations of conformity, certificates, and other certification details.
AC Drives Wiring and Grounding Guide, publication DRIVES-IN001	Provides instructions for proper AC drive wiring.
Weichert, H.; Benz, P.; Liberto, S.: Application of (Motor Protection) Circuit Breakers in Combination with Variable Frequency Drives, 57th Holm Conference on Electrical Contacts, Portland, 2012 http://literature.rockwellautomation.com/idc/groups/literature/documents/wp/140m-wp002-en-p.pdf	Describes the interaction of VFD-pulses with cable, motor and switchgear (English).
Weichert, H.; Benz, P.; Liberto, S.: Wechselwirkung zwischen elektromechanischen Schaltgeräten und Frequenzumrichtern, 22. Albert-Keil-Kontaktseminar, Karlsruhe, 2013 http://literature.rockwellautomation.com/idc/groups/literature/documents/wp/140m-wp002-de-p.pdf	Describes the interaction of VFD-pulses with cable, motor, and switchgear (German).
Safety Guidelines for the Application, Installation, and Maintenance of Solid-state Control, publication SG1-1.1	Designed to harmonize with NEMA Standards Publication No. ICS 1.1-1987 and provides general guidelines for the application, installation, and maintenance of solid-state control in the form of individual devices or packaged assemblies incorporating solid-state components.
Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1	Provides general guidelines for installing a Rockwell Automation industrial system.
Product Selection and Configuration tools, rok.auto/systemtools	Helps configure complete, valid catalog numbers and build complete quotes based on detailed product information.
Rockwell Automation Global SCCR tool, rok.auto/sccr	Provides coordinated high-fault branch circuit solutions for motor starters, soft starters, and component drives.
Product Certifications website, rok.auto/certifications	Provides declarations of conformity, certificates, and other certification details.

Rockwell Automation Support

Use these resources to access support information.

Technical Support Center	Find help with how-to videos, FAQs, chat, user forums, Knowledgebase, and product notification updates.	rok.auto/support
Local Technical Support Phone Numbers	Locate the telephone number for your country.	rok.auto/phonesupport
Technical Documentation Center	Quickly access and download technical specifications, installation instructions, and user manuals.	rok.auto/techdocs
Literature Library	Find installation instructions, manuals, brochures, and technical data publications.	rok.auto/literature
Product Compatibility and Download Center (PCDC)	Download firmware, associated files (such as AOP, EDS, and DTM), and access product release notes.	rok.auto/pcdc

Documentation Feedback

Your comments help us serve your documentation needs better. If you have any suggestions on how to improve our content, complete the form at rok.auto/docfeedback.

Allen-Bradley, expanding human possibility, PowerFlex, Rockwell Automation, and Rockwell Software, are trademarks of Rockwell Automation, Inc.
EtherNet/IP is a trademark of ODVA, Inc.
Trademarks not belonging to Rockwell Automation are property of their respective companies.

Rockwell Automation maintains current product environmental compliance information on its website at rok.auto/pec.

Rockwell Otomasyon Ticaret A.Ş. Kar Plaza İş Merkezi E Blok Kat:6 34752, İçerenköy, İstanbul, Tel: +90 (216) 5698400 EEE Yönetmeliğine Uygundur

Connect with us.    

rockwellautomation.com — expanding **human possibility®**

AMERICAS: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000
EUROPE/MIDDLE EAST/AFRICA: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2663 0600
ASIA PACIFIC: Rockwell Automation SEA Pte Ltd, 2 Corporation Road, #04-05, Main Lobby, Corporation Place, Singapore 618494, Tel: (65) 6510 6608
UNITED KINGDOM: Rockwell Automation Ltd., Pitfield, Kiln Farm, Milton Keynes, MK11 3DR, United Kingdom, Tel: (44)(1908) 838-800

Publication 140M-AT002C-EN-P - May 2025
Supersedes Publication 140M-AT002B-EN-P - April 2016

Copyright © 2025 Rockwell Automation, Inc. All rights reserved. Printed in the U.S.A.